


**The instruction. Nixie
clock IN-14 Mini**

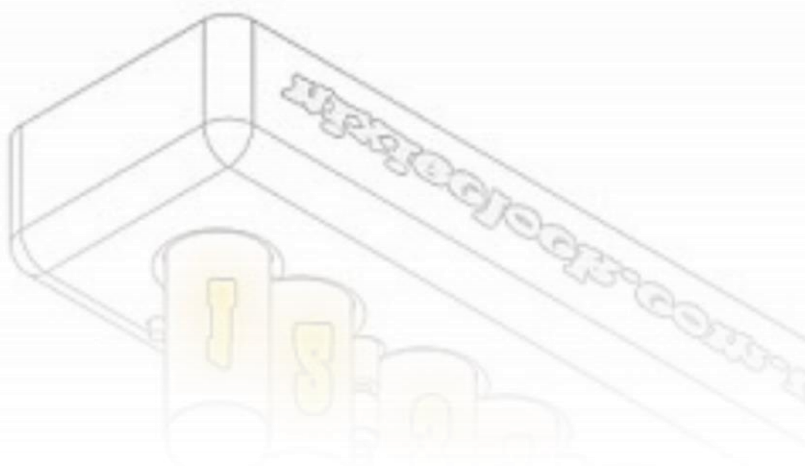

The instruction.

Three buttons: “Mode”, “+”, ”-” are used for control navigation.

Short pressing “+” – manual control of brightness.

0 – automatically control of brightness.

1–6 – 5 levels of brightness.

Short pressing “-” – backlight on.

Prolonged holding “Mode” – enter the main menu.

* – extinguished lamp.

“Mode” – transition on menu.

“+” – increase the value.

”-” – decrease the value.

The main menu.

On the screen:

1* 2* 3* – submenu selection.

Submenu 1. Time and date setting (button “-”).

Screen 1:

XX.XX.XX. – set HH.MI.SS.

Screen 2:

XX.XX.XX. – set DD.MM.YYYY.

Submenu 2. Control the delimiters, lamp “training” and date (button “Mode”).

Screen 1:

0*X*X* – Delimiters are constantly on light.

1*X*X* – Delimiters are blinking.

X* ()* X* – display time of date (in seconds).

0 – date display is off.

1–6 – display time of date is equal to 1–6 seconds.

X* X* ()* – the number of times of date display in minute

Screen 2:

Time period of lamp “training”.

0* (XX XX) – Off.

1* (XX XX) – On.

(XX XX) – setting the time period of lamp “training”.

Submenu 3. Control the alarm clock and the hourly signal.

Screen 1:

0* (XX XX) – Alarm clock is off.

1* (XX XX) – Alarm clock is on.


(XX XX) – setting the operating time period of alarm clock.

Screen 2:

0* (XX XX) – Hourly signal is off.

1* (XX XX) – Hourly signal is on.

(XX XX) – setting the operating time period of hourly signal.

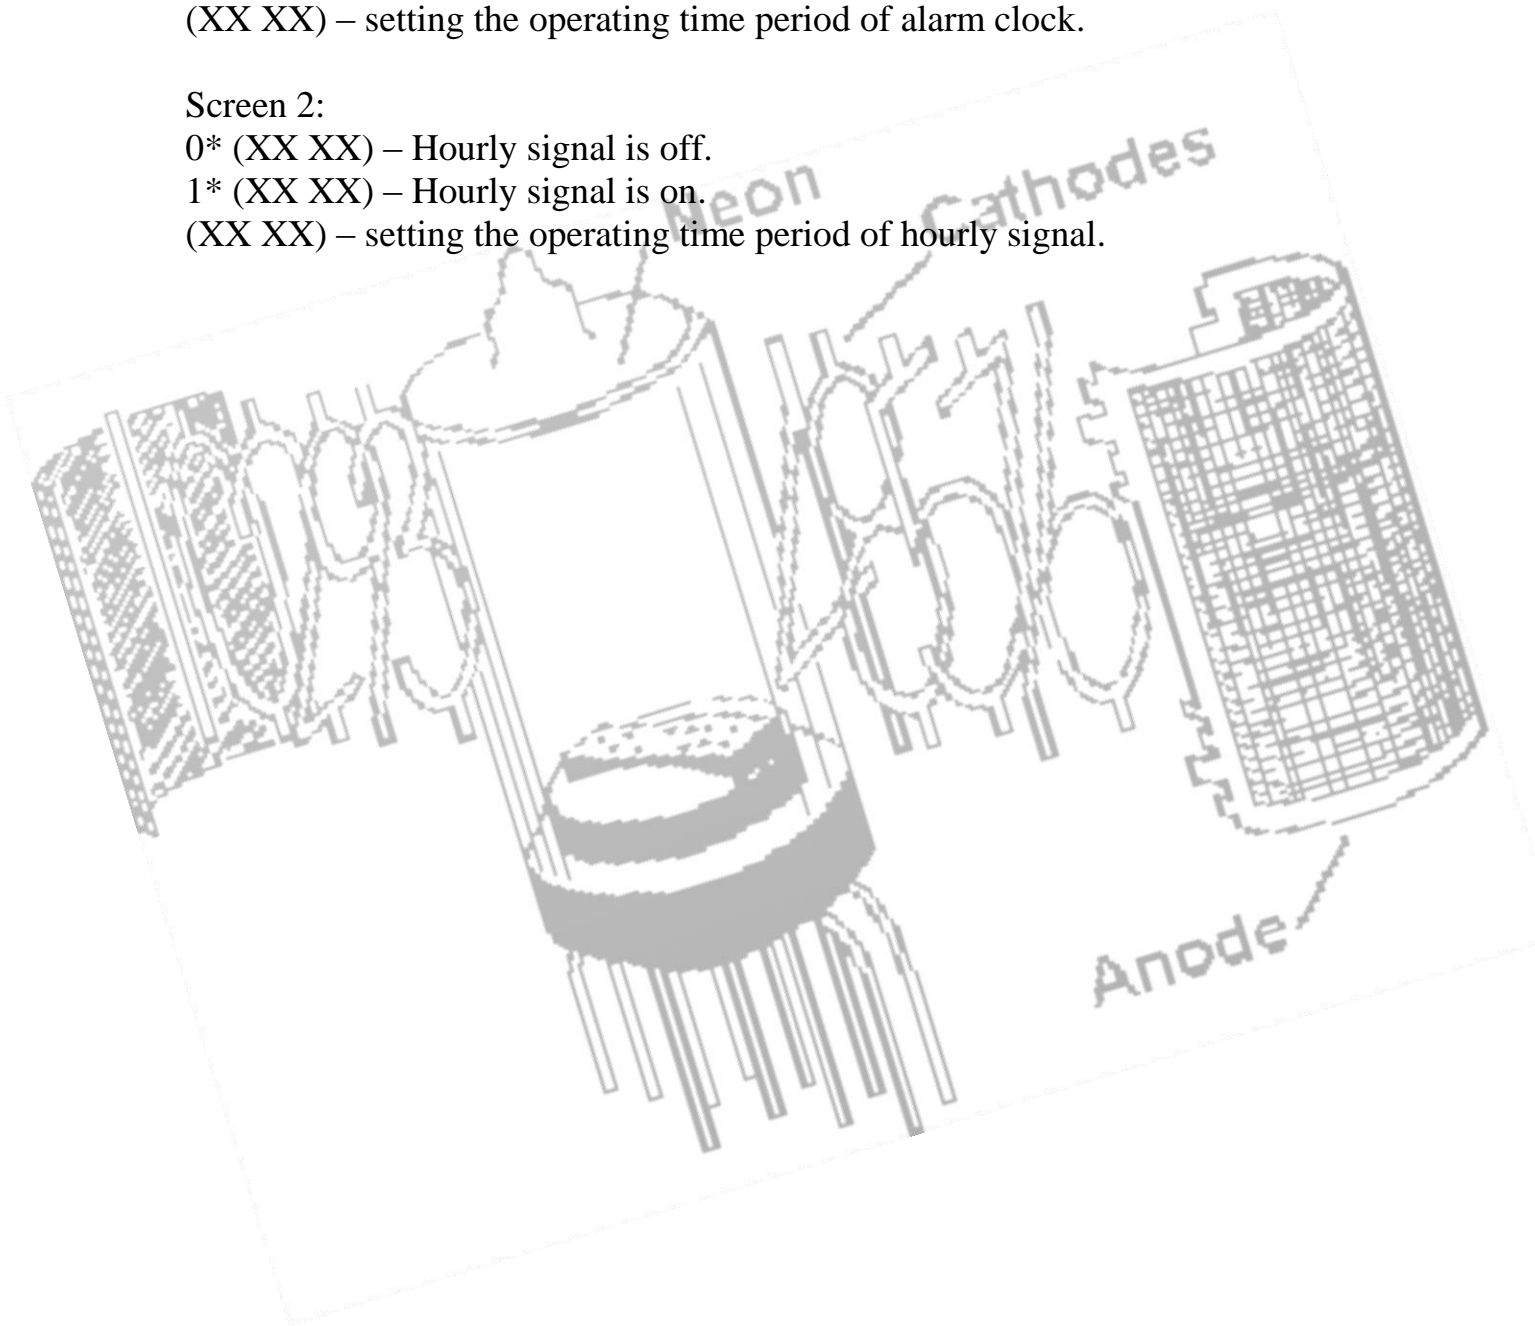

Buttons
 “-” “Menu” “+”

Button “Menu” (holding for 3 seconds)					
Display of submenu numbers 1* 2* 3*					
Select the submenu number: but. (“-”) – 1 submenu, but. (“Menu”) – 2 submenu, but. (“+”) – 3 submenu					
1 submenu Time and date setting		2 submenu Control the delimiters, lamp “training” and date		3 submenu Control the alarm clock and the hourly signal	
Select the number of submenu screen – enumeration of possibilities – but. “Menu”					
Screen 1 Time setting	Screen 2 Date setting	Screen 1 Control the delimiters and date	Screen 2 Setting lamp “training” time	Screen 1 Alarm clock	Screen 2 Hourly signal
HH.MI.SS	DD.MM.YYYY	0*X*X* – Delimiters are constantly on light. 1*X*X* – Delimiters are blinking. X* ()* X* – display time of date (in seconds). 0 – date display is off. 1–6 – display time of date is equal to 1–6 seconds. X* X* ()* – the number of times of date display in minute	0* (XX XX) – Off. 1* (XX XX) – On. (XX XX) – setting the time period of lamp “training”.	0* (XX XX) – Alarm clock is off. 1* (XX XX) – Alarm clock is on. (XX XX) – setting the operating time period of alarm clock.	0* (XX XX) – Hourly signal is off. 1* (XX XX) – Hourly signal is on. (XX XX) – setting the operating time period of hourly signal.
“-” down “+” up					
Value changing					

